692 SERIES

692 Medallion with a luminous perforated or solid edge detail which provides a soft uniform glow.

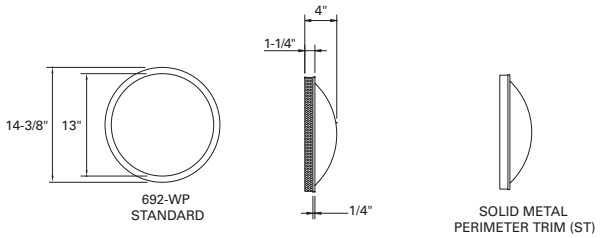

Sample Number: 692-T5C/1/22-347V-PCP

Series	Lamp	Voltage	Finish	Options
692=Medallion	INC/2/40 T5C/1/22 T5C/1/40	120V 277V[1] 347V[1]	MB, MW (standard), CC, OBRS, PB, PC, PCP, PN, SB, SC, SCL, SCP, SN, SNL	DL REM[2] FD ST

Notes:
1 Available with CFL only.
2 Supplied by others.

MATERIAL
Painted or plated cold-rolled steel base metal. Matte white acrylic lense.

LAMP/SOCKET
One (1) 22W or 40W T5 circular fluorescent lamp or two (2) 40W frosted A-19 lamps. Fluorescent socket injection molded plastic. INC socket fired ceramic rated for 660W-250V. Lamps furnished by others.

BALLAST
Integral electronic HPF, multi-volt 120/277V (347V Canada), thermally protected with end-of-life circuitry to accommodate the specified lamp wattage.

INSTALLATION
Supplied with a universal circular strap for a standard 4" J-box or plaster ring.

FINISH AND OPTIONS
See page 1020 for finish details and options.

693 & 693/4 SERIES

693 Medallion features Two Floating Rings with a luminous bowl.
The 693/4 Medallion features One Floating Ring and is ADA compliant.

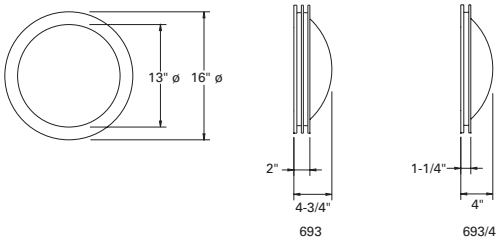

Sample Number: 693-T5C/1/22-347V-PCP

Series	Lamp	Voltage	Finish[2]	Options
693=Medallion w/ Two Floating Rings **693/4**=ADA Compliant Medallion w/ Two Floating Rings	INC/2/40 T5C/1/22 T5C/1/40	120V 277V [1] 347V [1]	MW (standard), CC, OBRS, PB, PC, PCP, PN, SAL, SB, SC, SCL, SCP, SN, SNL	1PHTB 1PHTB/1PVTB 1PHTB/1PVTB/HC 2PHTB/2PVTB DL REM[3] FD

Notes:
1 Available with CFL only.
2 For polished finishes the bottom inside edge of the ring is satin to prevent upper ring reflections.
3 Supplied by others.

MATERIAL
Painted steel or plated solid brass. Matte white acrylic lense.

LAMP/SOCKET
One (1) 22W or 40W T5 circular fluorescent lamp or two (2) 40W A-19 lamps. CFL socket injection molded plastic. INC socket fired ceramic rated for 660W-250V. Lamps furnished by others.

BALLAST
Integral electronic HPF, multi-volt 120/277V (347V Canada), thermally protected with end-of-life circuitry to accommodate the specified lamp wattage.

INSTALLATION
Supplied with a universal circular strap for a standard 4" J-box or plaster ring.

FINISH AND OPTIONS
See page 1020 for finish details and options.

693-S & 693-S/4 SERIES

693-S features Three Stepped Floating Rings with a luminous bowl.
693/4-S features two stepped rings with a luminous bowl and is ADA compliant.

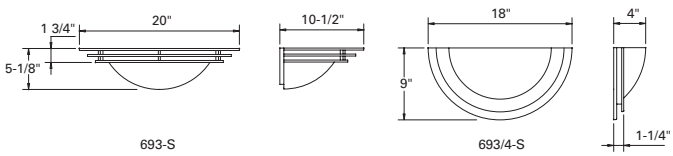

Sample Number: 693-S-CFL/2/13-347V-PCP

Series	Lamp	Voltage	Finish	Options
693-S=Stepped Ring Sconce **693-S/4**=ADA Compliant Stepped Ring Sconce	CFL/2/7[1, 2] CFL/2/13[3] CFL/2/26[3] INC/1/75	120V 277V[4] 347V[4]	WM (standard), CC, OBRS, PB, PC, PCP, PN, SB, SC, SCL, SCP, SN, SNL	DL DM[5, 6, 3] REM[7] FB HL

Notes:
1. Available in 120V only. 2. Available with 693/4-S Series. 3. Available with 693-S Series.
4. Available with CFL only. 5. Consult the factory for available options. 6. 26W Only. 7. Supplied by others.

MATERIAL
Painted or plated cold-rolled steel base metal. Matte white acrylic lense.

LAMP/SOCKET
693-S: Two (2) 13W (2GX7) 4-pin low wattage CFL, or 26W (GX24Q3) 4-pin triple tube CFL lamps, or one (1) 75W A-19 lamp.
693/4-S: Two (2) 7W (2G7) 4-pin (120V only)low wattage CFL lamps or one (1) 75W A-19 lamp. CFL socket injection molded plastic. INC socket fired ceramic rated for 660W-250V. Lamps furnished by others.

BALLAST
Integral electronic HPF, multi-volt 120/277V (347V Canada), thermally protected with end-of-life circuitry to accommodate the specified lamp wattage.

INSTALLATION
Supplied with a universal circular strap for a standard 4" J-box or plaster ring.

FINISH AND OPTIONS
See page 1020 for finish details and options.